Window Tinting Instructions - Window Tint Film UK Ltd.

Items needed to start:

1. 70% water / 30% alcohol solution for cleaning.

2. Plant Spray type bottle filled with solution made up of 5 drops of Johnson's Baby Shampoo or washing up liquid to one pint of water. We sell our own solution & bottles also.

- 3. Low lint paper towels / cloths
- 4. Yellow Squeegee (supplied)

5. Cutting knife. (supplied)

REMEMBER! A Video and further instructions can be found on our website: www.tintfilm.co.uk under the instructions link on the top bar. Read through these instructions a number of times first!



#2 Spray the solution on the glass



#4 Place the tint on the outside first. Remember, Sticky side up (pick away at a corner really hard to find this!) AND cut out a little more than the area of the window! Then leave it there for now.

#6 With the tint on the outside of the glass we can get on with wetting and cleaning the inside of the glass ready to transfer the tint from the outside to inside where the wetted adhesive side will bond to the glass with squeeging.

But not yet! We must clean that glass like brand new to prevent dents and scratches! The inside is the important side!



#1 Spray the outside of the driver and passenger glass with an alcohol solution, and wipe completely totally very clean! No marks or grit!



#3 Carefully remove the tint. We're going to cut it to size first on the outside of the window.



#5 Spray the inside of the window well with solution to prevent the squeegee from scratching the tint.



#7 Squeegee the window carefully with overlapping stokes to clean the window thoroughly.



#8 Carefully peel off liner making sure the film stays on the glass, you have just revealed the adhesive side which will be placed face down on the inside of the window in the next steps!



#11 Pull the liner down evenly until you are 2 inches from the bottom edge



#13 Remove film and liner from outside of glass, be careful not to let the liner come off the film the rest of the way! We're about to put the tint on the inside now where it should be!



#15 Spray solution on tint and squeegee water from tint starting at the top middle and working all the way to the edges. Work halfway down, wrap paper towel around squeegee and squeegee top edge pushing upward to absorb water (as shown in figure #23) Get the water and bubbles out!



#9 Slowly peel back, (spray the film loads whilst peeling) You should be spraying the tints adhesive side! It's usually easier to do this on the outside of the window as above.




#12 Make sure your hands and fingers are clean!



#14 Place tint on the glass 1/16" from the edge on the top of the glass. This is why factory "pre-cut" tints don't work as they are too exact and leave no room to squeegee into place.



#16 Roll window all the way up

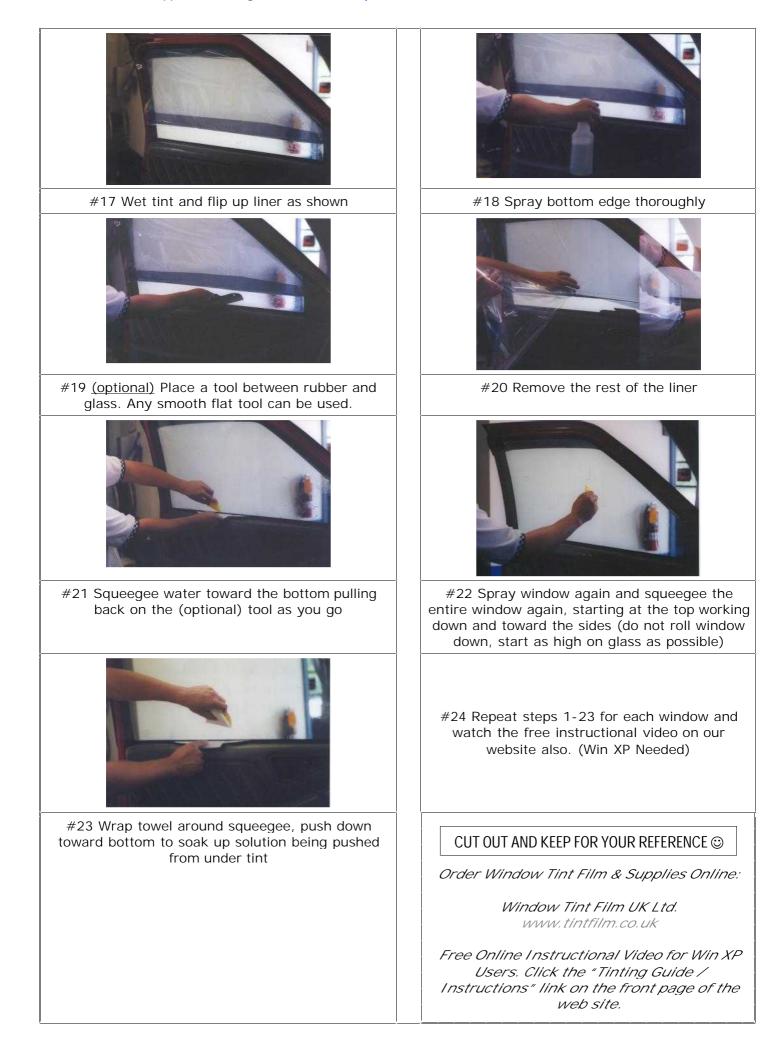

BASIC INSTRUCTIONS

Basic outlined instructions for customers to quickly understand the main principles of Window Tinting O



TOP TIPS:Don't do this outside on a windy day it just won't work
Get a friend to help you if you have one.
Even better is to take the windows out and make things even easier.
If friends have great ideas, be careful listening to them! Use the instructions.
For rear windows, apply the tint in the usual manner and cut a horizontal line
across the middle of the film, this will allow you to squeegee through and will only
leave a very fine almost invisible line as long as you squeegee each way to prevent
the gap from opening or closing.

For extra help go to: www.tintdude.com For More Kits go to www.tintfilm.co.uk

And our online video at www.tintfilm.co.uk (small link at the top right of the page).

More tint film kits including 1.5m x 30m & 100m are also available. Email orders@tintfilm.co.uk